




Pitrukrupa Industries

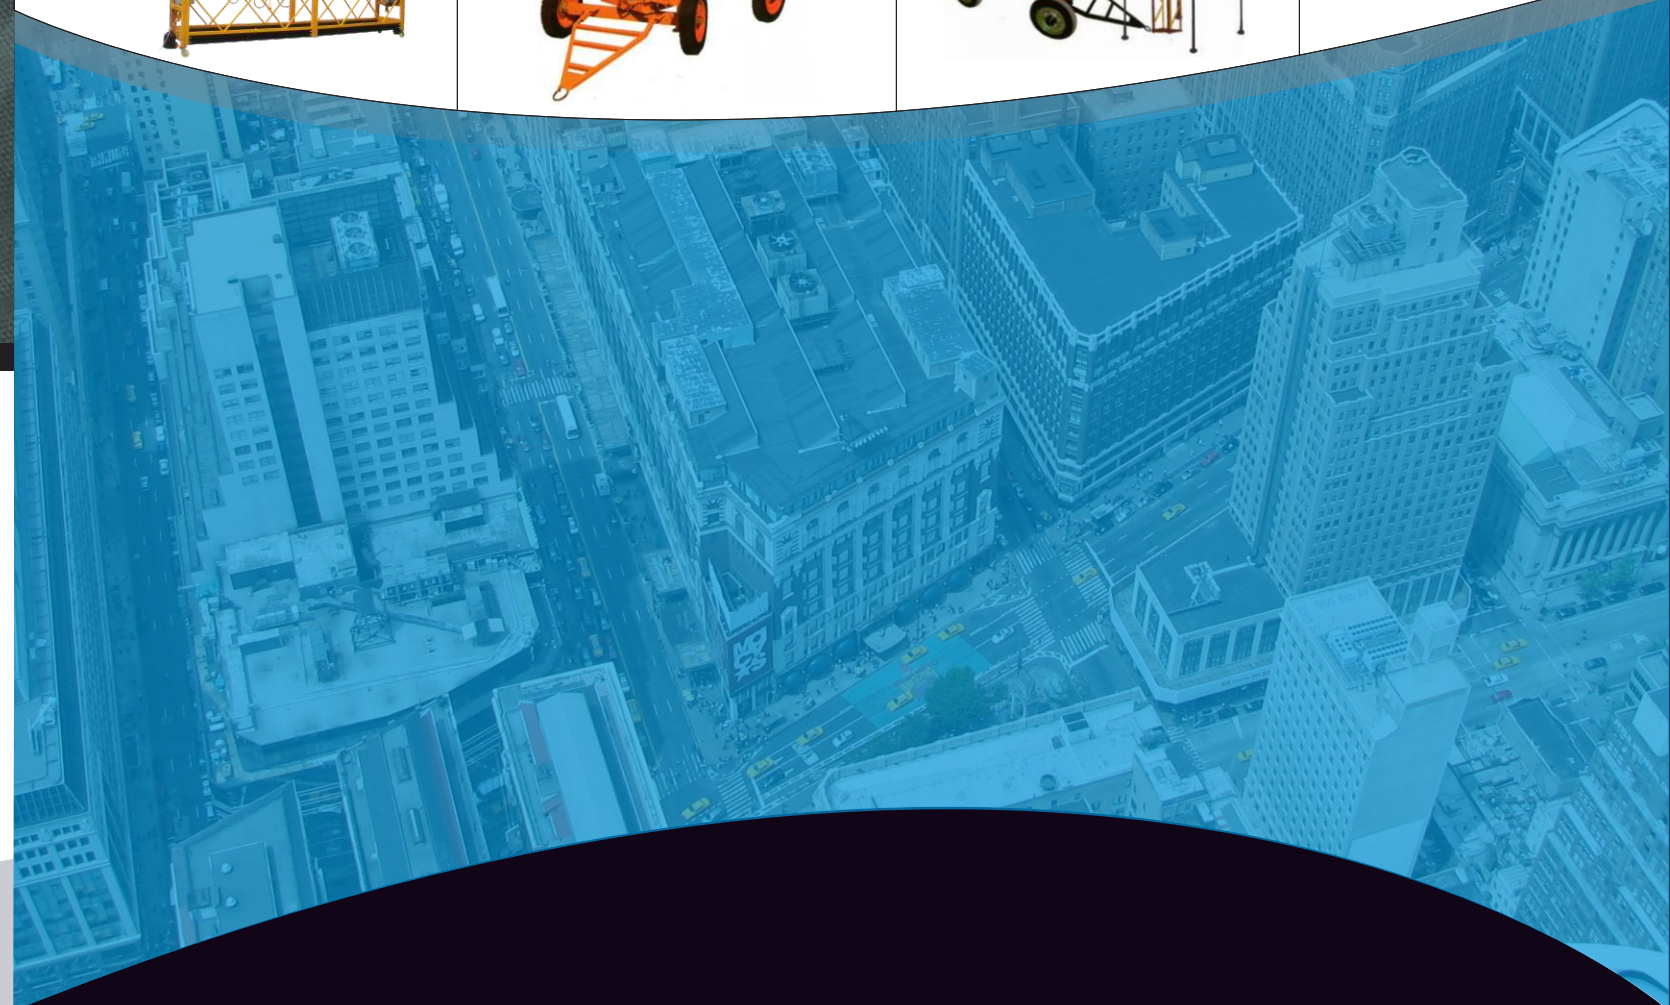

Pitrukrupa Industries


Kalawad Road, Opp. Motel The Village,
Behind HDFC Bank, Hariparpal, **Rajkot**. (Gujarat) India.
Ph. 0281-2783511, Cell. 098795 73101, 098243 72101

Web : www.pitrukrupaindustries.com
E-mail : pitrukrupa.industries101@gmail.com

Kruti Creation - 098254 86168

Manufacture & Supply of Construction Machineries

www.pitrukrupaindustries.com



Pitrukrupa Industries



Company Profile

Welcome To Pitrukrupa Industries. Pitrukrupa Industries, established in 2011, is leading manufacturers and exporters of the construction machinery. In the entire manufacturing process, we strictly comply with and ISO 9001:2008 certification, to ensure our quality. Thus, our products have received CE mark. Our Product range includes - Suspended working Platform, Concrete Mixer, Tower Hoist, Vibrator Pump, Wheel Trolley, etc..

Pitrukrupa Industries has nearly 3 decades of experience in manufacturing various machineries, which features excellent design, quality and reliability at competitive prices. We at Pitrukrupa believes in "Quality is a life of the company". Every sale from pitrukrupa reveals the superb service we provide. In order to bulid better machinery, we employ experienced technicians, import advanced equipments and implement strict quality control.

In addition, we have maintained business partnership with some of the top material suppliers, from whom we can always get better raw materials at preferential prices. As a result, our products are always sold at best prices. Our technology, outstanding quality, excellent after-sale services. We are located at Rajkot in the state of Gujarat (INDIA).

Pitrukrupa Industries welcome you to choose our Suspended Working Platform, Concrete Mixer, Tower Hoist, etc. machinery and their spare parts. We Welcome any query or enquiry. We are glad to deliver innovative solutions and excellent services to our customers.

Certificate

www.pitrukrupaindustries.com

Suspended Platform



Technical Specification

Model Type	ZLP 630	ZLP 800 A Type	ZLP 800 S Type	ZLP 1000		
Rated Load Capacity (kg)	630	800	800	1000		
Rated Lift Speed (m/min)	9 ~ 11	8	8 ~ 10	8 ~ 10		
Length of Platform (m)	6	7.5	7.5	7.5		
Wire Rope Diameter	8.3 mm, 4*31sw+Fc	8.6mm, 6*19+IWS	8.6mm, 6*19+IWS	8.6mm, 6*19+IWS		
Hoist	Model Type	LTD 6.3	LTD 8 A Type	LTD 8 S Type	LTD 10	
	Motor	Rated Lift Force (KN)	6.17	7.84	7.84	9.8
		Power (kw)	1.5	1.8	2.2	3
		Voltage	415 V 50 HZ	415 V 50 HZ	415 V 50 HZ	415 V 50 HZ
		Frequency (Hz)	50	50	50	50
		Rotate Speed (rpm)	1420	1420	1420	1420
Brake Torque (KN)	15	15	15	15		
Safety Lock	Permissible Force of Impact (KN)	30	30	30	30	
	Fall Distance Permitted	< 100	< 100	< 100	< 100	
	Till Angle Permitted	3° ~ 8°	3° ~ 8°	3° ~ 8°	3° ~ 8°	
Suspension Mechanism	Projecting Length of the Front Beam (m)	1.3 ~ 1.7	1.3 ~ 1.7	1.3 ~ 2	1.3 ~ 2	
	Adjustable Height of the Support Beam (m)	1.35 ~ 2	1.35 ~ 1.7	1.35 ~ 1.7	1.35 ~ 1.7	
Weight	Steel / Aluminum Platform (kg)	450/300	500/400	560 / 400	600 / 450	
	Suspension Mechanism (kg)	360	360	360	360	
	Counter Weight	900	1000	1000	1300	

7.5 CFT Concrete Mixer With Hopper

www.pitrukrupaindustries.com

7.5 CFT Concrete Mixer Without Hopper



Power Unit	(1) 6/5 H.P. Four Stroke Air-Cooled Diesel Engine Or (2) 5 H.P. Electric Motor
Mixing Drum	Speciality Shaped Mixing Blade Are Provide For Efficient Mixing
Dimensions (Approx.)	Overall Length : 6'.1" Overall Width : 6'.8" Overall Weight : 9'.5"
Total Weight	1360 Kgs.




Power Unit	(1) 6/5 H.P. Four Stroke Air-Cooled Diesel Engine Or (2) 5 H.P. Electric Motor
Mixing Drum	Speciality Shaped Mixing Blade Are Provide For Efficient Mixing
Dimensions (Approx.)	Overall Length : 8'.10" Overall Width : 5'.6" Overall Weight : 6'.2"
Total Weight	900 Kgs.



Pitrukrupa Industries

10/7 CFT Concrete Mixer With Hydraulic Hopper

Manual and Electronic Lifting Machine

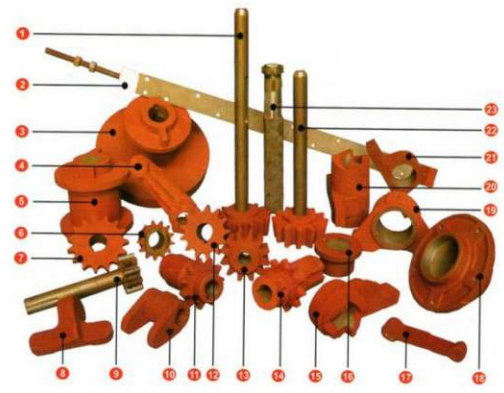


Power Unit	(1) 8 H.P. Four Stroke Air-Cooled Diesel Engine Or (2) 7.5 H.P. Electric Motor
Mixing Drum	Speciality Shaped Mixing Blade Are Provide For Efficient Mixing
Dimensions (Approx.)	Overall Length : 9'.6" Overall Width : 6'.8" Overall Weight : 9'.5"
Total Weight	1375 Kgs.

Specification

Capacity	450 Kg.
Speed Limit	18 Mtr./Min
Motor	5 HP, 415V
Gear Box	Reduction
Length	As per Require
Height	As per Require
Wire Roop	45 Mtr.
Break & Lock	Electronic
Operation	Panel/Handle/Remote



Tower Hoist

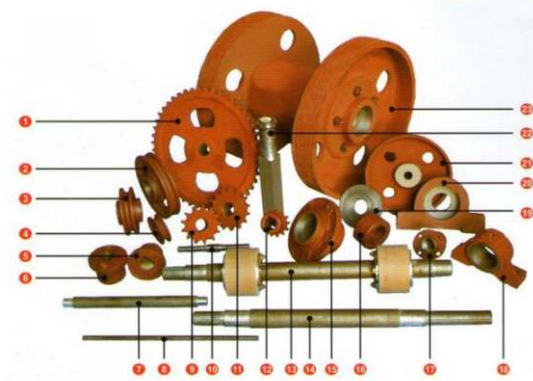

Technical Specification

Model	5 floors	10 floors	14 floors	20 floors
Net Capacity	450 kg. 10/7 CFT	450 kg. 10/7 CFT	450 kg. 10/7 CFT	450 kg. 10/7 CFT
Max. Height (ft.)	65	130	178	250
Speed (mtr./min.)	25-30	25-30	25-30	25-30
Diesel Engine (or)	10 H.P. Diesel Engine	12 H.P. Diesel Engine	14 H.P. Diesel Engine	25 H.P. Diesel Engine
Electric Motor	7.5 H.P. 3 Phase	10 H.P. 3 Phase	12 H.P. 3 Phase	20 H.P. 3 Phase
Drive	Friction roller type	Friction roller type	Friction roller type	Friction roller type
Wheels	20" Pneumatic wheel	20" Pneumatic wheel	20" Pneumatic wheel	20" Pneumatic wheel

Single/Double Wheel Trolley



Track System



Electric Vibrator



Cube Mould



Material Lifting Machines



Specification

Capacity	350 Kg.
Speed Limit	18 Mtr./min
Motor	5 HP, 415V
Gear Box	Reduction
Boom Length	2100 mm
Boom Height	2300 mm
Stand height	1000 mm
Wire Rope	45 mtr.
Loft Height	42 mtr.
Brake & Lock	Electronic
Operation	Panel
Rotation	360°
Wheel Barrow	2 Pec



Sand Scanning Machine



Square Folding Pipe



Plaster Stand

